


Simply stick with BRAVAT


Adapter assembly – gluing process

Clean surface with pure alcohol (do not use bathroom cleaners). Remove the film from the prefixing tape and the carrier tape and press the adapter onto the wall. Push glue through the boreholes and moisten the adapter well with water, as this will activate the curing process. The accessory can be mounted straight away.

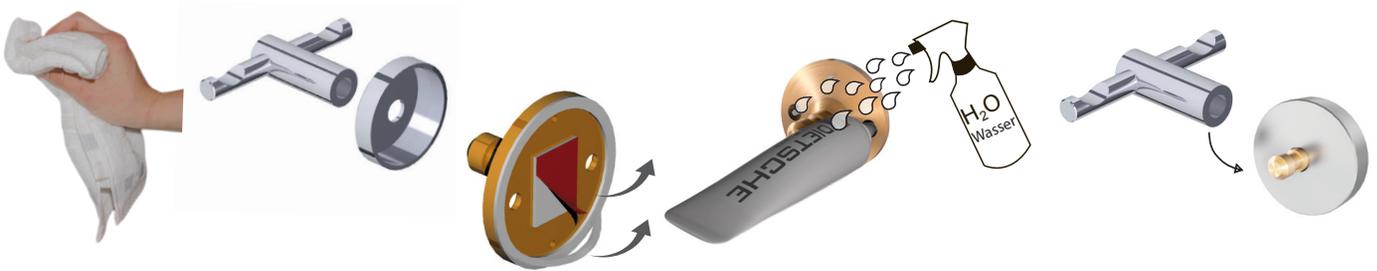

Disassembly without residue

Use a pipe wrench to turn the adapter off the wall. Remove adhesive residue with a glass scraper/silicon remover.

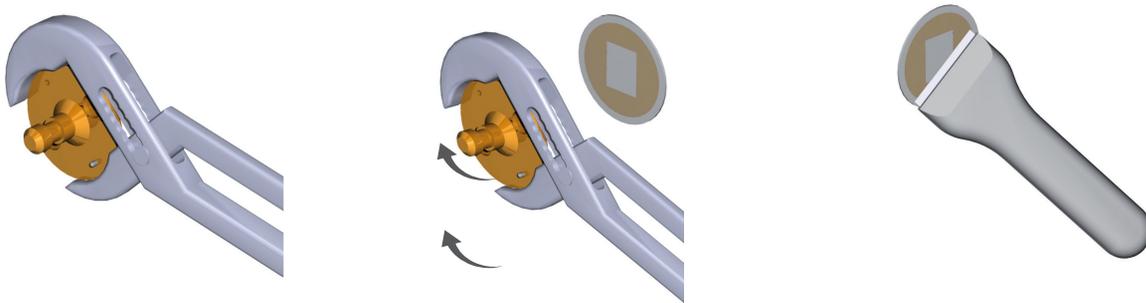

Gluing or screwing? It's your choice!


Advantages of adhesive technology

- No noise, nor dust, nor dirt
- No drilled pipes or wires
- Without damages on tiles by drilling holes
- Removable without residues
- Stable & with high load capacity

Practical & easy assembly

- Using a highly load-bearing and moisture-resistant gluing tape, the accessory can be assembled instantly
- No waiting period: No second drive necessary
- Suitable for virtually any viable (including moist) surface

Developing the bonding strength *

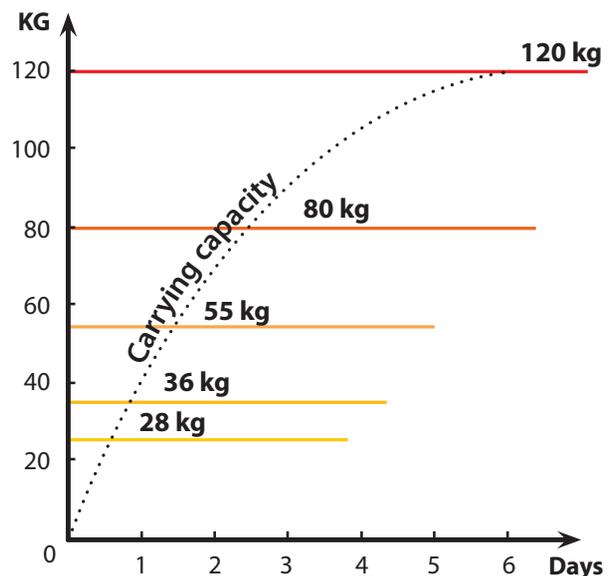

* Achievement of final strength after 5-7 days.